

# 3000 Series


## A3138CG000E



### Features

- Gigabit Ethernet interface, providing 1Gbps bandwidth with a maximum transmission distance of 100m;
- 256MB on-board cache for data transmission or image resend;
- Support Software Trigger/Hardware Trigger/Free Run Mode;
- Support ISP functions including Sharpness/Denoising/Gamma/LUT/BlackLevel Correction/TargetBrightness/Contrast etc.;
- Support multiple image data formats output/ROI/Binning/Mirror, etc.;
- Conform to GigE Vision V2.0 protocol and GenICam standard;
- Conform to CE, FCC, UL, RoHS;

### Dimensions (mm)

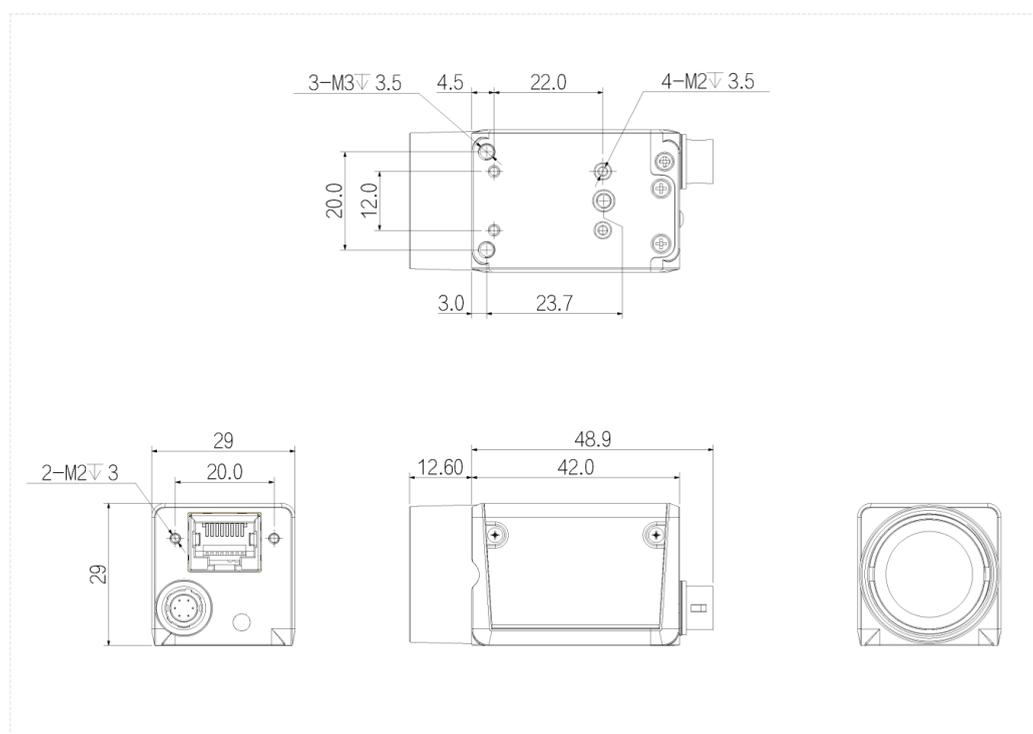

## Specification

	Model	A3138CG000E
Basic	Sensor	SS
	Image Sensor	1/2.7"CMOS
	Shutter	Global
	Resolution	1280 × 1024
	Frame Rate	92 fps
	Bit Depth	10
	Mono/Color	Color
	Pixel Size	4.0 μm × 4.0 μm
Image	Pixel	1.3 MP
	S/N Ratio	38 dB
	Dynamic Range	60 dB
	Image Format	Mono8/10/10Packed
	Binning	Support
	ROI	Support
	X Flip	Support
	Y Flip	Support
	Gain	1 ~ 32
	Gamma	From 0 to 4, support LUT
	Exposure Time	16 μs ~ 1 s
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode
	SPC	Support
Performance	User Setting	Support two sets of user-defined configurations
	Image Buffer	256MB
Port	Port	GigE, PoE
	GPIO Interface	1× 6 pin Hirose: 1× Opto-isolated input, 1× Opto-isolated output, 1 configurable input and output
	Lens Mount	C-mount
Power	Power Supply	PoE/ DC 9V~24V power supply via Hirose interface
	Power Consumption	12 V≈3.3 W
Structure	Product Dimensions	29 mm × 29 mm × 42 mm (not including lens mount and rear case connector)
	Net Weight	88 g
Environment	Storage Temperature	- 30°C ~ +80°C
	Operating Temperature	0°C ~ +50°C