



Vortex flow meter



Contents

Product description.....	1
Working principle.....	1
Features.....	2
Products.....	3
Technical parameter.....	4
Dimensions of flange clamped vortex flow meter.....	5
Flange connection type vortex flow meter size.....	6
Flow range table.....	7
LUGB Vortex flow meter Selection Table.....	8

Product description

AFTLUGB type vortex flow meter is widely used in petroleum, chemical, metallurgy, thermal, textile, paper and other industries for superheated steam, saturated steam, compressed air and general gases (oxygen, nitrogen, hydrogen, natural gas, gas, etc.), water and liquid (Such as: water, gasoline, alcohol, benzene, etc.) measurement and control.

Working principle

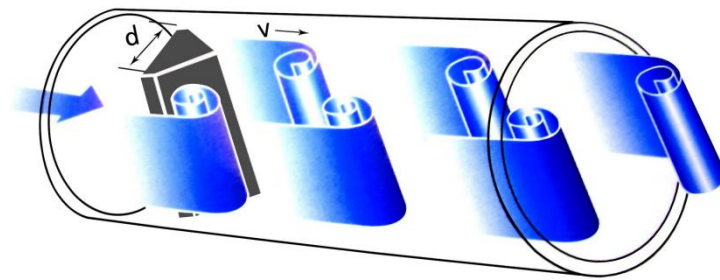


Figure 1: Working principle diagram of karman vortex street


Setting a triangular prism vortex generator in the flow meter, regular vortex will be generated at both the sides of triangular prism, which is called karman swirl. As showed on the drawing 1.1, vortex are arranged regularly at the downstream of vortex generator. Suppose the vortex generation frequency is f , the average flow velocity of medium is v , d is the width of the surface of triangular prism incident flow, and D for the nominal diameter of flow meter. Then we get the computation formula:

$$f = Sr \frac{\bar{V}}{(1 \sim 1.25 d/D) d}$$

Features

- ❖ Simple and firm structure, no moving parts, high reliability, very reliable for long-term operation.
- ❖ Simple installation and convenient maintenance.
- ❖ The detection sensor does not directly contact the measured medium, with stable performance and long service life.
- ❖ The output is a pulse signal proportional to the flow rate, no zero drift, and high accuracy.
- ❖ Wide measuring range, up to 1:10 range ratio.
- ❖ The pressure loss is small, the operating cost is low, and it is more energy-saving.
- ❖ Within a certain Reynolds number range, the output signal frequency is not affected by the fluid physical properties and composition changes. The meter coefficient is only related to the shape and size of the vortex generator. No compensation is required when measuring the fluid volume flow, and it is generally not necessary after changing accessories. Recalibrate the meter coefficient.
- ❖ Wide range of application, the flow of steam, gas and liquid can be measured.
- ❖ The inner diameter of the vortex flow sensor is 25-300mm (full tube)
- ❖ Insert type vortex flow sensor application inner diameter range is 350-1200mm (Insert type)
- ❖ The accuracy of measuring liquid with full tube is 1%
- ❖ The accuracy of measuring steam and gas is 1.5%
- ❖ The accuracy of the liquid measurement is 2%
- ❖ The accuracy of measuring steam and gas is 2.5%
- ❖ The measured medium temperature is -20~150°C, -40~250°C, +100~350°C (tube only). The output signal is three-wire voltage pulse, three-wire system 4-20mA, two-wire system 4-20mA。

Products



①



②



③



④




⑤



⑥



⑦

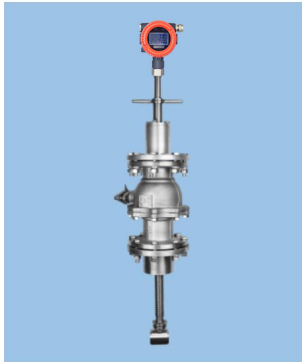


⑧

① AFTLUGB/S type flange card connection vortex flow meter	⑤ AFTLUGB/B flange connection vortex flow meter
② AFTLUGB/S type flange connection vortex flow meter	⑥ AFTLUGB/B type flange card connection vortex flow meter
③ AFTLUGB/S simple Insert type vortex flow meter	⑦ AFTLUGB/B simple Insert type vortex flow meter
④ AFTLUGB/S split vortex flow meter	⑧ AFTLUGB/B type flange ball valve vortex flow meter

Technical parameter

Nominal diameter (mm)	25,40,50,65,80,100,125,150,200,250,300, (300~1000Insert type)
Nominal pressure (MPa)	DN25-DN200 4.0 (>4.0Agreement Supply) , DN250-DN300 1.6 (> 1.6Agreement Supply)
Medium temperature (°C)	Piezoelectric: -40~260, -40~320; Capacitive: -40~300, -40~400, -40~450 (order agreement)
Body material	1Cr18Ni9Ti, (Other material agreement supply)
Allow vibration acceleration	Piezoelectric: 0.2g Capacitive: 1.0~2.0g
Accuracy	±1%R, ±1.5%R, ±1FS; Insert type type: ±2.5%R, ±2.5%FS
Extent	1:6~1:30
Supply voltage	Sensor: +12V DC, +24V DC; Transmitter: +12V DC, +24V DC; Battery-powered type: 3.6V battery
Output signal	Square wave pulse (excluding battery-powered type): high level $\geq 5V$, low level $\leq 1V$; current: 4~20mA
Pressure loss coefficient	Comply with JB/T9249 standard $C_d \leq 2.4$
Explosion-proof mark	Intrinsically safe type: Exd II ia CT2-T5 Flameproof type: Exd II CT2-T5
Protection class	Common type IP65 diving IP68
Environmental conditions	Temperature -20°C~55°C, relative humidity 5%~90%, atmospheric pressure 86~106kPa
Applicable medium	Gas, liquid, steam
Transmission distance	Three-wire pulse output type: $\leq 300m$, two-wire standard current output type (4~20mA): load resistance $\leq 750\Omega$


Dimensions of flange clamped vortex flow meter

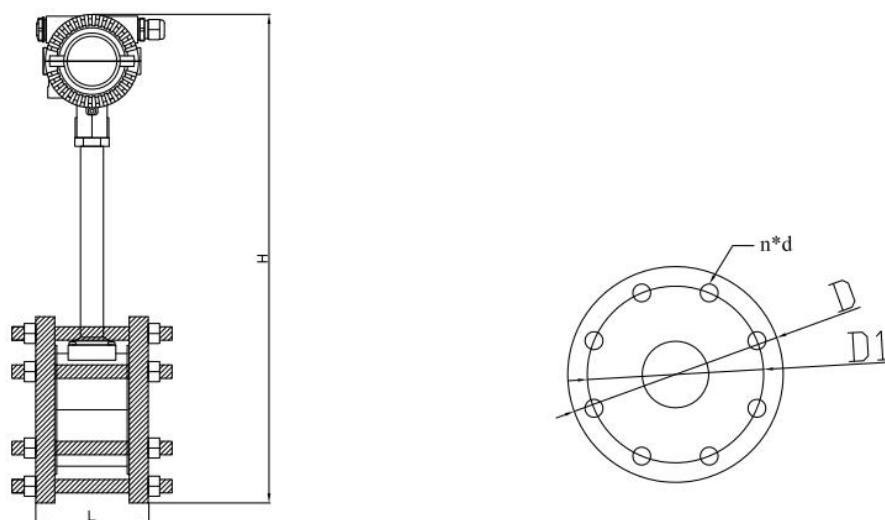

Size (mm)	15	20	25	32	40	50	65	80	100	125	150	200	250	300
L (mm)	101	101	101	115	115	123	123	123	142	156	171	195	214	229
H (mm)	420	420	420	430	430	435	435	450	460	475	490	520	550	575
D (mm)	125	125	125	145	145	160	180	195	215	245	280	335	405	460
D1 (mm)	100	100	100	120	120	125	145	160	180	210	240	295	355	410
N (pce)	4	4	4	4	4	4	4	6	8	8	8	12	12	12
d (mm)	14	14	14	14	14	18	18	18	18	18	22	22	26	26

HGT20592 PN16, other flange standards can be customized, please inform before ordering.

Flange connection type vortex flow meter size

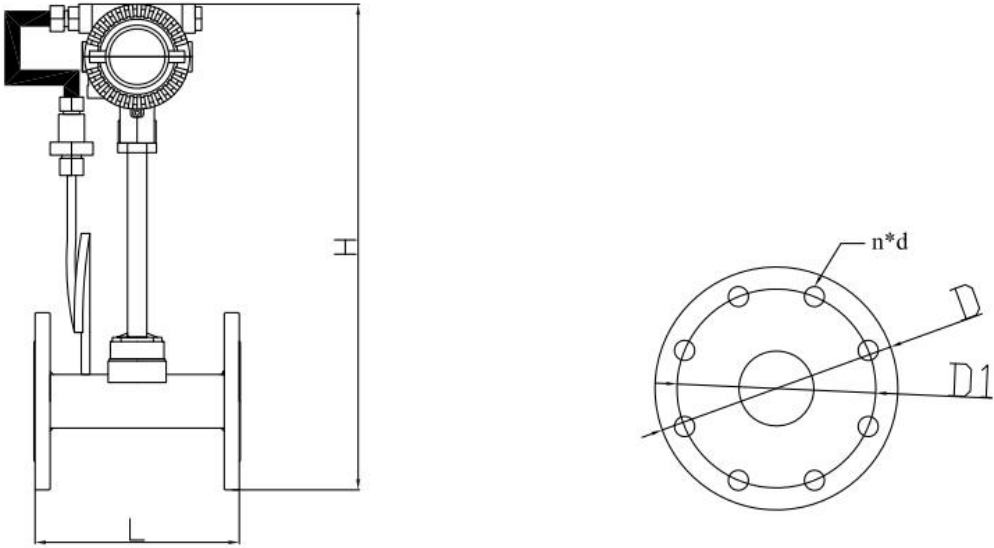

Size (mm)	15	20	25	32	40	50	65	80	100	125	150	200	250	300
L (mm)	180	180	180	180	180	180	200	200	200	220	220	220	250	300
H (mm)	416	423	431	448	456	470	488	501	525	552	584	636	696	749
D (mm)	95	105	115	140	150	165	185	200	220	250	285	340	405	460
D1 (mm)	65	75	85	100	110	125	145	160	180	210	240	295	355	410
N (mm)	4	4	4	4	4	4	8	8	8	8	8	12	12	12
d (mm)	14	14	14	18	18	18	18	18	18	18	22	22	26	26

The flange standard of this table is HGT20592 PN16, other flange standards can be customized, please inform before ordering.

Flow range table

Caliber (mm)	Liquid		Gas	
	Range(m3/h)	Output frequency range (hz)	Measurement range (m3/h)	Output frequency range (hz)
15	0.3~6	0.3~6	2.8~15	0.3~6
20	1~10	1~10	5.5~50	1~10
25	1.6~16	1.6~16	8.5~70	1.6~16
32	2~20	2~20	18~130	2~20
40	2.5~25	2.5~25	22~220	2.5~25
50	3.5~35	3.5~35	36~320	3.5~35
65	6.5~68	6.5~68	50~480	6.5~68
80	10~100	10~100	70~640	10~100
100	15~150	15~150	130~1100	15~150
125	27~275	27~275	200~1700	27~275
150	40~400	40~400	280~2240	40~400
200	80~800	80~800	580~4960	80~800
250	120~1200	120~1200	970~8000	120~1200
300	180~1800	180~1800	1380~11000	180~1800
(400)	180~3000	180~3000	2750~27000	180~3000
(500)	300~4500	300~4500	4300~43000	300~4500
(600)	450~6500	450~6500	6100~61000	450~6500
(800)	750~10000	750~10000	11000~110000	750~10000
(1000)	1200~17000	1200~17000	17000~170000	1200~17000
> (1000)	Agreement		Agreement	

Note: The normal flow range is the minimum and maximum flow, and the alternative flow is the maximum flow provided by the customer during model selection

AFTLUGB Vortex flow meter Selection Table

Model											Explanation
AFTLUGB	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	
Nominal diameter	15~3000										DN15-DN3000mm
Instrument type	A										Intelligent temperature and pressure compensation type, 24VDC, 4-20mA
	B										Intelligent temperature compensation type, 24V DC, 4-20mA
	C										Intelligent pressure compensation type, 24V DC, 4-20mA
	X										Intelligent field display type, 24V DC, 4-20mA
	N										Transmitter type, 24VDC, Pulse output /4-20mA
Accuracy class	10										Accuracy 1.0%
	15										Accuracy 1.5%
	20										Insertion (Liquid Accuracy 2.0%)
	25										Insertion (Gas Accuracy 2.5%)
Material	S										304SS
	L										316L
Explosion-proof grade	N										Without
	E										Explosion-proof type (Ex d ia[ia Ga] q HC T6 Gb)
Pressure Level	N										1.6MPa
	H(X)										High pressure customization(2.5MPa.4.0MPa...)
Communication protocol	1										Without
	2										RS485/Moudbus protocol
	3										Hart Agreement
Measuring medium	1										Liquid
	2										General gas
	3										Saturated Vapor
	4										Superheated steam
Rated temperature	1										Below 150℃
	2										Below 250℃
	3										Below 350℃
Connection method	1										Flange clamping type
	2										Flange connection type
	3										Simple insert type
	4										Ball valve insert type
	5										Other customization (Tri clamp/Thread)
Power supply	1										3.6V lithium battery
	2										24V DC



Survive by quality, seek development by integrity

Kaifeng AFT Instrument Co., Ltd.

Factory Address: North Section of Shanghe Avenue, Xiangfu District, Kaifeng City, Henan Province

Phone: +86-371-26660001

Email: aftinstruments@gmail.com

Website: <http://www.aft-instruments.com>